

jc665 U.S. PTO
05/27/99

EXPRESS MAIL LABEL NO. EL121366968US

Date of Deposit: May 27, 1999

LMC:ejk 5/27/99

PATENT

Attorney's Ref. No. 6047-51973

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box PATENT APPLICATION
TO THE ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

jc594 U.S. PTO
09/321518
05/27/99

Transmitted herewith for filing is the patent application of:

Inventor(s): Terry L. Gilton and Li Li

For: SEMICONDUCTOR FABRICATION METHODS AND APPARATUS

Enclosed are:

- ☒ 12 pages of specification, 10 pages of claims, an abstract and a Declaration of Inventor for Patent Application and Power of Attorney by Assignee and Certificate by Assignee Under 37 CFR § 3.37(b).
- ☒ 2 sheet(s) of formal drawings.
- ☒ An assignment of the invention to: Micron Technology, Inc. and a Recordation Cover Sheet.
- ☐ A certified copy of a _____ application.
- ☐ Associate Power of Attorney.
- ☐ Information Disclosure Statement.
- ☐ Form PTO-1449 and copies of documents listed thereon.
- ☐ A copy of a petition for extension of time, which is a separate paper being filed in a prior application.

FILING FEE					
For	Claims Filed	Number Filed	Number Extra	Rate	Basic Fee
Total Claims	46	20	= 26	\$18.00	\$ 468.00
Independent Claims	16	3	= 13	\$78.00	\$1,014.00
Multiple Dependent Claim Fee				\$260.00	
TOTAL FILING FEE					\$2,242.00

- ☒ A check in the amount of \$2,282.00 to cover ☒ filing fee and ☒ assignment recordal fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge any additional fees which may be required in connection with the filing of this application and recording any assignment filed herewith, or credit over-payment, to Account No. 02-4550. A copy of this document is enclosed.

EXPRESS MAIL LABEL NO. EL121366968US

Date of Deposit: May 27, 1999

LMC:ejk 5/27/99

PATENT


Attorney's Ref. No. 6047-51973

☒ Please return the enclosed postcard to confirm that the items listed above have been received.

Respectfully submitted,

KLARQUIST SPARKMAN CAMPBELL
LEIGH & WHINSTON, LLP

By



Lisa M. Caldwell

Registration No. 41,653

One World Trade Center, Suite 1600
121 S.W. Salmon Street
Portland, Oregon 97204
Telephone: (503) 226-7391
Facsimile: (503) 228-9446

cc: Ms. Lisa Boyer
David P. Petersen, Esq.
Docketing Secretary

SEMICONDUCTOR FABRICATION METHODS AND APPARATUS

Filed of the Invention

5 The present invention relates to the field of semiconductor device fabrication and wafer cleaning.

Background and Summary of the Invention

10 During the processing of semiconductor wafers used in manufacturing integrated circuits and the like, it is typically necessary to remove chemicals or residues from the wafer surface. For example, it is sometimes necessary to etch openings or other geometries into a thin film deposited onto (or grown on) the surface of a wafer substrate. (The wafer substrate typically comprises silicon, gallium arsenide, glass, an insulating material such as sapphire, or any other substrate material upon which an
15 integrated circuit wafer may be fabricated.) Present methodology for etching such a thin film requires that the film be exposed to a chemical etching agent to remove desired portions of the film or films. The composition of the etching agent used to remove the portion of the film depends upon the nature of the
20 thin film.

 In order to ensure that only desired portions of the thin film are removed, a photolithography process is use by which a pattern is transferred to the surface of the thin film. The pattern serves to identify the areas of the thin film that are to be selectively removed. The pattern is typically formed with a
25 photoresist material, typically a light-sensitive material that is spun onto the in-process integrated-circuit wafer also in the form of a thin film. The thin film of photoresist is then exposed to a high intensity light source that is projected through a photomask. The photomask defines a desired pattern. As the light source is projected through the photomask, the desired pattern is defined on the
30 photoresist thin film. The exposed or unexposed photoresist, depending upon the polarity of the photoresist material, is dissolved (i.e., is removed or stripped)

with developers, leaving a pattern that allows etching to take place in the selected areas only.

Some of the current methods for stripping the photoresist (or other materials, such as dry-etch residues or polymers) include a hot chemical removal with a chemical etching agent. Sulfuric acid and hydrogen peroxide or dry reactive removal, known as photoresist ashing are typical removal methods. The hot chemical removal methods are undesirable in that they involve great expense due to the relatively large amount of chemical etching agent needed and require expensive disposal methods due to the caustic nature of the chemical etching agents. The ashing method is undesirable in that it involves a high-energy gas and often incurs damage to the wafer substrate or the layers of thin films formed on the wafer substrate to make the wafer integrated circuits.

Some chemicals in the gaseous phase may react with photoresist material or other such materials to facilitate removal of the materials from the wafer surface. Many of such gases, however, do not have effective transport means to the wafer surface to effect the necessary reaction in a reasonable period of time. Also, many such gases are too unstable to be introduced to the wafer in an atmosphere filled with such gas and effect the necessary reaction with the photoresist material. Such gases typically have short half-lives and change in structure in such environments so quickly that the gas is unable to react with a thin film material on the surface of a wafer. Many such gases (both the unstable gases and those lacking sufficient transport characteristics), however, are sufficiently soluble in a variety of liquid solvents.

For example, there has been a current interest in the use of ozone (i.e., O_3) as a photoresist etching agent for the stripping of photoresist, dry etch residues/polymers, and the like from a wafer surface. Ozone reacts with photoresist material on the wafer surface to oxidize the photoresist (forming CO_2). Ozone, however, is an unstable gas and will decompose before reacting with the wafer surface photoresist material if simply introduced in its gaseous state. Accordingly, a solvent is used to dissolve the ozone and transport the

ozone to the wafer surface such that the ozone may react with the photoresist material and strip the photoresist material from the wafer surface.

Water may act as a solvent to dissolve ozone. One method for use of ozone as a stripping agent involves immersing the in-process wafer into a water bath through which ozone is bubbled. It is difficult, however, to get a sufficient amount of ozone dissolved in the water to affect the desired oxidation reactions. Further, the amount of ozone transported to the wafer surface is limited due to the large amount of water filling the bath. Consequently, the stripping process is very slow.

Without being tied to any particular theory, it is believed that a main barrier to dissolution of the gas into water is kinetic in nature. Another method calls for chilling a water bath and using a diffusion plate in the water to bubble ozone gas therethrough. The diffusion plate creates numerous tiny bubbles that rise through the water. The wafers are then immersed in the water bath. During this residence time, the gas dissolves in the liquid by crossing the gas/liquid interface so that the ozone in the water strips the photoresist (or other material) on the wafer. Other methods for dissolving the gas into the liquid (e.g., water) include the use of static mixing devices and membrane contactors.

This method, however, relies heavily on the configuration and performance of the diffusion devices (e.g., the diffusion plate in the water bath) and requires long time periods of exposure of the gas to the water. The increased time and the need for diffusion apparatus add undesirable time and complexity to the process. Further, the photoresist stripping effectiveness of such processes is limited, as discussed above, as only a small amount of ozone moves to (i.e., has physical contact with) the surface of the wafer while the wafer is immersed in the water bath.

Accordingly, methods and apparatus are needed to fabricate and/or clean wafers without incurring the expense and apparatus complexity encountered with the prior art methods and apparatus. Additionally, methods and apparatus are needed that provide effective stripping of photoresist, dry

etch residues/polymers, or the like in a reasonably short time period. Further, methods and apparatus are needed that can overcome the kinetic limitation to dissolution of a gas in a liquid without the need for long exposure times of the gas to the liquid.

5 To overcome the disadvantages of the prior art, methods and apparatus are disclosed herein. The methods and apparatus provided eliminate the need for large amounts of caustic chemical cleaning agents to remove photoresist, dry etch residues/polymers, or the like. The methods and apparatus provided also require only a relatively small amount of gas and liquid
10 to strip the photoresist, dry-etch residues/polymers, or the like. Additionally, the methods and apparatus overcome the kinetic limitation of dissolution of the gas in the liquid without requiring long exposure times of the gas to the liquid. Further, the methods and apparatus provide a liquid solvent that effectively transports the reactant gases that most effectively and quickly strip photoresist material (or other material) from a wafer surface. The liquid solvent, however,
15 does not react with materials on the wafer surface, but merely acts as a transport medium to put the reactant gas in physical contact with the wafer surface.

More specifically, an in-process wafer is placed in a chamber,
20 preferably a chamber of low volume. A liquid solvent (e.g., water) incorporates (e.g., dissolves) a reactant gas (e.g., ozone) to create a "reactant mixture." The reactant gas in the mixture will react with and remove photoresist material (or other material) on the wafer surface. In one representative method, the reactant mixture enters the chamber and forms a thin film on one or more
25 surfaces of the wafer. The chamber preferably includes a reactant gas atmosphere during and/or after formation of the thin film. The solvent acts as a transport medium to place the reactant gas in direct physical contact with the wafer surface. The reactant gas is then able to react with the photoresist material (dry etch residue/polymer or the like) on the in-process wafer surface to
30 effect removal of the material. The solvent does not react with the photoresist material (or other material at issue) to be removed nor with the reactant gas.

The solvent acts merely to transport a sufficient amount of the reactant gas to the wafer surface such that the gas reacts with the photoresist material to effect removal.

For example, ozone (i.e., a reactant gas for conventional photoresist material) dissolves in water (i.e., an ozone solvent or "transport medium") to form a reactant mixture. The reactant mixture condenses to form a thin layer on one or more wafer surfaces. The ozone reacts with the photoresist to form CO_2 . The water does not react with the photoresist (or the ozone), but merely transports a sufficient amount of the ozone gas to the wafer surface so that the ozone gas reacts with the photoresist to effect removal in a relatively short period of time. Following reaction with the photoresist, the layer of reactant mixture is removed from the wafer surface by flash heating, rinsing, drained, or other suitable removal method.

In the representative methods and apparatus, the reactant mixture condenses or otherwise collects on the wafer surface to form a thin film thereon. The high surface area to volume ratio of the thin film reactant mixture results in transport of a relatively high volume or concentration of reactant gas directly onto the wafer surface. Accordingly, the removal of photoresist (or the like) from the wafer surface occurs relatively rapidly. The methods and apparatus allow the removal process to be carried out in a low volume chamber requiring a minimal amount of reactant gas and solvent. Additionally, both the reactant gas and the solvent may be purified and re-circulated during the wafer fabrication process, thereby wasting little chemical and having little chemical waste for which disposal is necessary.

The foregoing features and advantages of the methods and apparatus will become more apparent from the following detailed description of representative methods and apparatus that proceed with reference to the accompanying drawings. The present invention is directed toward novel and non-obvious features and advantages of the disclosed methods/apparatus for fabricating and cleaning in-process wafers, both individually and collectively, as

set forth above and additionally as set forth in the drawings and description following.

Brief Description of the Drawings

Fig. 1 is a partial cross-sectional view of an in-process wafer.

Fig. 2 is a cross-sectional view of a closed reaction chamber including in-process wafers therein which wafers are undergoing one step of a photoresist stripping method.

Fig. 3 is a general block diagram of a photoresist stripping system.

Fig. 4 is a flow diagram illustrating a number of representative methods.

Detailed Description of the Invention

Methods and apparatus for removing photoresist material, dry etch residues/polymers, and like materials from an in-process wafer, are provided. For ease of discussion, the methods and apparatus are primarily discussed in terms of the stripping of photoresist from an in-process wafer surface. It should be understood that the methods and apparatus may be used to remove a variety of materials and residues from wafer surfaces and are not limited to the stripping of photoresist material. Further, reactant gases and liquid solvents useful for practicing the methods are primarily discussed in terms of ozone in water. It should be understood that a variety of reactant gases (including mixtures of gases) and liquid solvents (as discussed below) may be used to practice the invention.

In general, an in-process wafer is placed within a chamber. A reactant gas is incorporated into a solvent (for example, the liquid solvent may dissolve the reactant gas) to form a "reactant mixture" that is capable of reacting with the photoresist material to facilitate removal of the photoresist material from the wafer surface.

A number of the representative methods are illustrated in outline form in Fig. 4. In one representative method, the reactant mixture enters the

chamber in the vapor phase. A vapor is a gas at a temperature below the critical temperature. The vapor phase reactant mixture condenses on one or more of the in-process wafer surfaces to form a thin film or layer on the surface(s) of the wafer. The solvent acts as a transport medium to place the reactant gas on the wafer surface(s). The reactant gas is then able to react with the photoresist material on the in-process wafer surface to effect removal of the material. Following reaction of the reactant gas with the photoresist, the condensed reactant mixture is removed from the wafer surface by flash heating, rinsing, draining, or other suitable method. The process preferably takes place in a reactant gas atmosphere. Alternatively, preferably the process includes flowing a stream of reactant gas over the thin film.

More specifically, a first representative method includes stripping photoresist material from an upper surface of an in-process wafer, such as the wafer shown in Fig. 1. A typical, in-process wafer 12 is being formed on a substrate 14, such as a silicon substrate. A film 16 is deposited on the substrate 14. A layer of photoresist material 18 is applied on film 16. The photoresist material 18 is exposed and developed, patterning openings 20. Openings 20 allow subsequent, selective etching of film 16. The photoresist material 18 then needs to be stripped from the in-process wafer 12.

Accordingly, in a first method, in-process wafers 12 are placed into a chamber 10 of an apparatus such as is shown in Fig. 2. The embodiment of the reaction chamber 10 shown in Fig. 2 includes in-process wafers 12 positioned on the interior 26 of the chamber. The in-process wafers 12 are, preferably placed in a boat 24 that supports the wafers in a vertical position. Alternatively, a boat or other holder may support the wafers 12 in a horizontal position, or any other position that allows access to the surface of the wafer 12 to be treated.

Chamber 10 is preferably closed to form a controlled environment such that its contents are not exposed to the ambient atmosphere. Thus, contaminants, such as oxygen, cannot contact the surface of the in-process wafers 12. Alternatively, chamber 10 may comprise a module (or separate

modules) within a tool cluster. A top chamber opening 28 communicates on an upstream side of the chamber with a valve 30 and on a downstream side with the interior 26 of the chamber 10. Valve 30 is fluidly connected to a solvent source 34 and to a reactant gas source 38. Solvent source 34 may comprise, e.g., a boiler. A bottom chamber opening 40 fluidly communicates with a drain 44 that is connected to a re-circulation/purification device, as discussed below. A gas outlet is located at the bottom of the chamber. A temperature controller, for controlling the temperature of the interior 26 of the chamber and/or the wafers 12 in the chamber is connected thereto.

10 A reactant gas (e.g., ozone) is then dissolved in a liquid solvent (e.g., water). The reactant gas comprises a gas or a mixture of gases capable of reacting directly with the photoresist material (or other material) on an in-process wafer surface to remove the photoresist material therefrom. Typically, the reactant gases are unstable unless dissolved in a solvent. The gases also include those gases that are stable but are not transported effectively in sufficient concentration to a wafer surface because the gas molecules do not remain in physical contact with the wafer surface long enough to react with the photoresist material thereon.

15 The solvents are those liquids that dissolve or otherwise incorporate a suitable concentration of the reactant gas. The solvents also are capable of forming a film of liquid (or condensate) on a wafer surface. For example, most any perfluorocarbon will dissolve the reactant gas ozone. The solvent, however is merely a transport medium for the reactant gas and does not react with the photoresist material (or other material) on the wafer surface. 20 The solvent may comprise a single solvent or a mixture of solvents.

25 In the first method, the reactant gas is first dissolved in the solvent to form a "reactant mixture." The reactant mixture is vaporized (i.e., volatilized) and introduced to the chamber 10 through upper chamber opening 28. In such a case, the solvent source 34 also includes a dissolved gas in the solvent. The concentration of the gas in the solvent is preferably at least from about 10% to about 95% gas to solvent by volume. In general, the concentration of the 30

reactant gas in the solvent should be as high as possible because higher reactant gas concentrations strip the photoresist material more quickly than do reactant mixtures having lower reactant gas concentrations.

The vaporous reactant mixture enters the interior 26 of the chamber 10 to condense on one or both surfaces of the in-process wafer 12 to form a film or layer thereon. To ensure the vaporous reactant mixture condenses to form a film or layer on the in-process wafer 12, the wafer may be cooled to a temperature equal to about the dew point of the solvent. At such a temperature, a thin film of the reactant mixture will form on one or more wafer surfaces. Alternatively, the wafer 12 may be at ambient temperature, but with ambient temperature being a temperature that is lower than the temperature of the reactant mixture. Good results are achieved when the wafer is at a temperature of about 10° C lower than the temperature of the reactant mixture. Under such conditions, the reactant mixture condenses on one or more of the wafer surfaces. The wafer preferably is not cooled to a temperature that would freeze the solvent as freezing may interfere with the transport characteristics of the solvent.

In the representative methods, the film or layer of reactant mixture formed on the in-process wafer 12 surface(s) is preferably from about 1 µm to about 100 µm in thickness. At a higher thickness, the reaction process slows. A thin film of about 2000 µm to about 3000 µm in thickness tends to cause a relatively, slow reaction process (likely to be about ten times slower than that of a thin film having a thickness of about 100 µm). The reaction time is also slower at lower temperatures, as would be expected.

The reactant gas in the thin film reactant mixture reacts with the photoresist (or other material) in a relatively short time. Typically, the reactant gas sufficiently reacts with the photoresist material in about five minutes for a thin film layer having a thickness of about 100 µm and a reactant gas concentration of about 10 percent gas by volume. If the thin film is thicker, the reaction time period is longer to ensure sufficient removal of the photoresist.

In the first method (as well as the representative methods discussed below), the process preferably takes place in an atmosphere of reactant gas. Alternatively, preferably the process includes flowing a reactant gas stream over the film or layer.

5 Following reaction of the reactant gas with the photoresist (or other material to be removed), the reactant mixture thin film is removed. The reactant mixture thin film material is removed from the wafer surface(s) by heating the wafer or heating the wafer environment (preferably in hot nitrogen gas). Alternatively, the reactant mixture thin film material may be removed by
10 rinsing the wafer 12, allowing the thin film to drip off the wafer 12, or any other suitable manner (dependent upon the nature of the wafer at issue).

 In a second representative method, the reactant mixture is introduced to the interior 26 of the chamber 10 in the liquid phase by a nebulizer 32 in the chamber 10. The nebulizer 32 may comprise an ultrasonic
15 nebulizer or any other suitable device for forming a fine mist of the reactant mixture. The nebulizer 32 creates a fine mist of tiny reactant mixture droplets. The droplets may be of any suitable size to condense on and form a thin film on the surface of an in-process wafer 12. In one embodiment, the nebulizer 32 produces reactant mixture droplets at about the Meinhardt droplet size (i.e.,
20 about 10 μm to about 50 μm). A nebulizer mist reactant mixture then condenses on one or more of the wafer 12 surfaces. At this point, the second method follows the method outlined above in relation to the first method (see Fig. 4).

 In a third method, the reactant mixture enters the chamber 10
25 through a shower device 46 positioned at upper chamber opening 28 of the reactant mixture. The reactant mixture is not in a vapor phase, but "drips" in the liquid phase from the shower device 46 to the vertically positioned in-process wafers 12. The dripping reactant mixture forms a thin film on the surface of the wafer 12. With such a method, a thicker layer of reactant
30 mixture tends to form on the lower portion of the vertically positioned wafer (due to gravity).

To ensure the desired thin film layer thickness over the entire wafer surface, a hydrophilic material may be put in physical contact with the lower portion of the wafer to remove excess reactant mixture therefrom (thereby ensuring a thin film of suitable thickness remains on the wafer surface).

5 Alternatively, the excess reactant mixture may be allowed to simply drip off of the wafer surface. A thinner film is desirable however, as the thinner film enables a quicker reaction of the reactant gas with the photoresist material, thereby increasing production throughput. When using the shower apparatus to form a thin film of the reactant mixture on a wafer surface, the wafer is
10 preferably at a temperature equal to about 25 °C while the reactant mixture is preferably at a temperature equal to about 90 °C. At this point, the third method follows the method outlined above in relation to the first method (see Fig. 4).

Referring to Fig. 3, in a fourth representative method, a reactant
15 gas from gas source 52 is dissolved in a solvent from solvent source 56 to form a reactant mixture. The reactant mixture is then introduced to a chamber 62 via valve assembly 30. Valve assembly 30 may include a boiler 36 connected to the solvent source 26. Chamber 62 is preferably a closed chamber for the reasons discussed above in relation to the chamber 10 apparatus. An in-
20 process wafer 12 is mounted on a spinner device 66. As the reactant mixture enters the chamber 62, the mixture is condensed on the wafer surface 68. The reactant mixture may pass through a mister or nebulizer 42 to form a mist of reactant mixture droplets. A film of reactant mixture is formed on the surface. The reactant mixture may be spun onto the wafer surface using any
25 conventional spinner device, such as the spinner shown in Fig. 3 but this is not a preferred method. The speed of rotation of the wafer 12 would be used to control the thickness of the thin film of reactant mixture formed on the wafer surface 68. At this point, the fourth method follows the method outlined above in relation to the first method.

30 Referring back to Fig. 2, in a fifth representative method, the reactant gas from reactant gas source 38 is introduced to the chamber 10

simultaneously with the solvent from the solvent source 34. The solvent is introduced to the chamber 10 in the vaporous phase (or liquid phase) such that the reactant gas dissolves in the solvent to form the reactant mixture while in the chamber 10. The reactant mixture then condenses or otherwise forms on the wafer surface, to form a thin film thereon. The rest of the fifth method is carried out as described above in relation to method one (see Fig. 4).

In a sixth representative method, the solvent is vaporized and then condensed on the wafer 12 to form a film thereon. The liquid solvent need not be vaporized but may form a layer or film on the wafer by any suitable means (e.g., nebulizing, showering, etc.). The film of solvent is then exposed to an atmosphere of the reactant gas within the chamber 10. The reactant gas dissolves in the film of solvent and reacts with the photoresist (or other material) on the wafer. The rest of the sixth method is carried out as described above for the first method (see Fig. 4).

Lastly, in each of the methods described above, following removal of the reactant mixture thin film (along with removal of any residual photoresist or other material) the reactant mixture is drained through lower chamber opening 40 to a drain 44. Drain 44 may be connected to a re-circulation/purification device 50 wherein the gas and solvent are purified and re-circulated to be used for the next batch of wafers.

Whereas the invention has been described with reference to multiple embodiments of the apparatus and representative methods, it will be understood that the invention is not limited to those embodiments. On the contrary, the invention is intended to encompass all modifications, alternatives, and equivalents as may be included within the spirit and scope of the invention as defined by the appended claims. For example, to form a layer or thin film of solvent or reactant mixture on the wafer surface, the wafer may be dipped into a container of the respective liquid.

CLAIMS:

1. A method for semiconductor wafer fabrication, the method comprising:

5 placing a layer of a liquid solvent on a surface of a wafer; and
transporting a reactant gas that is inert in the liquid solvent and that is capable of reacting with a material on the surface of the wafer through the layer of liquid solvent to the surface of the wafer.

10 2. The method of claim 1, wherein the solvent is selected from the group consisting essentially of water, perfluorocarbons, and mixtures thereof.

3. The method of claim 1, wherein the reactant gas is ozone.

15 4. The method of claim 1, wherein the layer of liquid solvent is continuous over the wafer surface and has a thickness of from about 1 micron to about 3000 microns.

20 5. The method of claim 1, wherein the layer of liquid solvent has a thickness of less than about 100 microns.

6. A method for semiconductor wafer fabrication, the method comprising:

25 incorporating a reactant gas that is capable of reacting with a material on the surface of a wafer into a liquid solvent that is inert to the material on the surface of the wafer to provide a reactant mixture; and
forming a film of the reactant mixture on the surface of the wafer so that the reactant gas is transported through the film of reactant mixture to
30 the surface of the wafer and reacts with the material thereon.

7. The method of claim 6, wherein the reactant gas is inert in the liquid solvent.

8. The method of claim 6, wherein the thin film of the reactant mixture has a thickness of from about 1 micron to about 100 microns.

9. The method of claim 6, including flowing the reactant gas over the thin film of the reactant mixture such that some of the flowing reactant gas is transported through the film to the surface of the wafer.

10. The method of claim 6, including cooling the wafer to a temperature equal to about a dew point of the liquid solvent.

11. A method for removing a material from a surface of a semiconductor wafer, the method comprising:

selecting a reactant gas capable of reacting with a material on a wafer surface;

condensing a liquid solvent onto a surface of the wafer from which material is to be removed, the liquid solvent being inert to the material on the wafer surface; and

exposing the condensed liquid solvent to the reactant gas, the reactant gas being inert to the solvent and reacting with the material on the wafer surface to remove such material.

12. The method of claim 11, including incorporating reactant gas into the liquid solvent to form a liquid solvent that comprises a reactant mixture that contains reactant gas, and wherein the step of condensing the liquid solvent comprises condensing the reactant mixture on a surface of the wafer such that the reactant gas reacts with and removes the material on the wafer surface.

13. The method of claim 11, including removing the reactant mixture from the wafer surface.

14. A method for semiconductor wafer fabrication, the method comprising:

vaporizing a liquid solvent that is inert to a material on a surface of a wafer;

selecting a reactant gas that is capable of chemically reacting with the material on the surface of the wafer;

incorporating the reactant gas into the vaporized liquid solvent; and
condensing the vaporized solvent incorporating the reactant gas to form a film on the surface of the wafer so that the reactant gas is transported through the film to the material on the surface of the wafer.

15. The method of claim 14, including flowing the reactant gas over the film such that some of the flowing reactant gas is transported through the film to the surface of the wafer.

16. A method for semiconductor wafer fabrication, the method comprising:

selecting a liquid solvent that is inert to a material on a surface of a wafer;

forming a mist of liquid solvent droplets above the surface of the wafer;

selecting a reactant gas that is capable of chemically reacting with the material on the surface of the wafer and exposing the reactant gas to the liquid solvent droplets; and

forming, on the surface of the wafer, a thin film of the liquid solvent and exposing the thin film to the reactant gas so that the reactant gas is transported through the thin film to the material on the surface of the wafer.

17. The method of claim 16, including cooling the wafer to a temperature equal to about a dew point of the liquid solvent.

18. The method of claim 16, wherein only one reactant gas is used.

19. The method of claim 16, wherein the thin film has a thickness of from about 1 micron to about 100 microns.

20. A method for cleaning a semiconductor wafer, the method comprising:

placing a liquid layer onto a surface of a wafer;

flowing a wafer cleaning gas over the liquid layer such that some of the flowing gas is transported through the liquid to the surface of the wafer; and

reacting the wafer cleaning gas transported through the liquid layer to the surface of the wafer with material on the wafer surface to clean the wafer.

21. The method of claim 20, wherein the liquid is a solvent for the cleaning gas.

22. The method of claim 20, wherein the liquid layer is a thin film on the wafer surface.

23. The method of claim 20, wherein the liquid is selected from the group consisting essentially of water, perfluorocarbons, and mixtures thereof.

24. The method of claim 20, wherein the cleaning gas is ozone.

25. The method of claim 20, wherein the liquid solvent is inert to the material on the surface of the wafer.

26. A method of semiconductor fabrication, the method
5 comprising:

selecting a liquid solvent that is inert to a material on a surface of a wafer;

selecting a reactant gas that is capable of chemically reacting with the material on the surface of the wafer and incorporating the reactant gas into
10 the liquid solvent; and

showering the liquid solvent incorporating the reactant gas onto the surface of the wafer and exposing the liquid solvent to the reactant gas so that the reactant gas chemically reacts with the material on the surface of the wafer.
15

27. A method according to claim 26, wherein the exposing step comprises exposing a film of the liquid solvent to the reactant gas while the film is on the wafer surface.

28. The method of claim 26, wherein the wafer is at a temperature equal to about 25 °C and the liquid solvent is at a temperature equal to about 90 °C.

29. The method of claim 26, wherein the wafer is supported in a
25 vertical position relative to the shower of liquid solvent.

30. A method for semiconductor wafer fabrication, the method comprising:

selecting a reactant gas capable of reacting with a material on a
30 wafer surface;

incorporating the reactant gas in a liquid solvent to form a reactant mixture;

forming a mist of reactant mixture droplets;

forming, on the surface of the wafer, a thin film of the reactant mixture so that the reactant gas is transported through the thin film to the material on the surface of the wafer.

31. A method for semiconductor wafer fabrication, the method comprising:

selecting a reactant gas capable of reacting with a material on a wafer surface;

incorporating the reactant gas in a liquid solvent that is inert to the material on the wafer surface;

forming a thin layer of the liquid solvent incorporating the reactant gas, on the wafer surface;

contacting the thin layer of liquid solvent with an atmosphere of the reactant gas; and

reacting the reactant gas with the material on the wafer surface to remove the material from the wafer surface.

32. A method for removing photoresist material from a semiconductor wafer, the method comprising:

selecting a liquid that does not chemically react with photoresist material;

forming a thin layer of the liquid on a surface of a wafer having photoresist material thereon;

introducing ozone gas over the layer of liquid such that some of the flowing ozone gas is transported through the thin layer of liquid solvent to the surface of the wafer; and

reacting the ozone gas transported to the surface of the wafer with the photoresist material on the wafer surface.

33. The method of claim 32, wherein the ozone gas is introduced prior to the formation of the layer of liquid.

5 34. The method of claim 32, wherein the ozone gas is introduced simultaneously with the formation of the layer of liquid.

35. The method of claim 32, wherein the ozone gas is introduced after the formation of the liquid layer.

10 36. The method of claim 32 in which the liquid layer is less than about 100 microns thick over the majority of the wafer surface containing the liquid layer.

15 37. A method for removing photoresist material from the surface of the wafer, the method comprising:

vaporizing a mixture of water and ozone gas;

condensing a thin layer of the mixture on a wafer surface having photoresist material thereon; and

20 reacting the ozone gas in the mixture with the photoresist material on the wafer surface to remove the photoresist material therefrom.

38. A method for removing photoresist material from the surface of the wafer, the method comprising:

25 forming a mist of droplets of a mixture of water and ozone gas;
forming a thin layer of the mixture on a wafer surface having photoresist material thereon; and

30 flowing ozone gas over the thin layer such that some of the flowing ozone gas is transported through the thin layer to the surface of the wafer; and

reacting the ozone gas in the thin layer with the photoresist material on the wafer surface to remove the photoresist material therefrom.

39. An apparatus for cleaning semi-conductor wafers, the wafers
5 having first and second wafer side surfaces, the apparatus comprising:
a chamber sized to receive at least one wafer to be cleaned;
a solvent applicator coupled to the chamber and adapted to apply a
solvent to at least one of the first and second side surfaces of the wafer
positioned within the chamber so as to form a film of liquid solvent on said at
10 least one of the first and second wafer side surfaces;
a gas source of at least one reactive gas coupled to the chamber
so as to deliver such gas to the chamber, the at least one reactive gas being
selected to chemically react with the surface of the wafer to clean the wafer;
and wherein
15 the liquid solvent comprises a transport medium which carries at
least some of the at least one reactive gas through the film to said at least one
of the first and second wafer side surfaces where the at least one reactive gas
chemically reacts with said at least one of the first and second wafer side
surfaces.

20

40. An apparatus according to claim 39 including a gas
incorporator adapted to introduce said at least one reactant gas into the solvent
prior to forming the film of liquid solvent.

25

41. An apparatus according to claim 39 wherein said at least
one reactant gas comprises ozone as a major component and the solvent
comprises water as a major component.

30

42. An apparatus for delivering ozone gas to the surface of a
wafer comprising:
a wafer receiving chamber;

a wafer carrier positioned within the chamber and carrying at least one wafer;

a liquid depositor adapted to form a layer of liquid on at least one major surface of a wafer supported by the wafer carrier within the chamber;

5 an ozone gas source coupled to the chamber so as to deliver ozone gas to the chamber and increase the concentration of ozone gas within the chamber;

the liquid layer transporting ozone gas to the surface of the wafer to thereby expose the wafer surface to ozone.

10 43. An apparatus according to claim 42 wherein the apparatus includes a temperature controller adapted to maintain the temperature of the wafer at the dew point of the liquid such that liquid from the liquid depositor is condensed onto the wafer to form the layer of liquid.

15 44. An apparatus for cleaning semi-conductor wafers comprising:

a chamber sized to receive at least one wafer to be cleaned;

20 a reactant gas source inlet and outlet, the inlet and outlet each communicating with the chamber and defining a gas flow path for reactant gas from the inlet to the outlet;

a reactant gas source coupled to the inlet such that reactant gas is delivered from the inlet and flows in the gas flow path to the outlet;

a wafer carrier positioned within the chamber and supporting at

25 least one wafer at least partially in the gas flow path;

30 a liquid layer former coupled to the chamber and operable to form a layer of liquid on at least one major surface of a wafer supported within the chamber, the liquid being selected so as to be substantially non-chemically-reactive with the reactant gas, whereby the reactant gas is transported through the liquid layer to the wafer surface, the reactant gas being selected so as to

chemically react with components on the surface of the wafer to clean the wafer.

45. An apparatus according to claim 44 including a reactant gas incorporator adapted to introduce reactant gas into the liquid before the liquid layer is formed.

46. An apparatus for stripping photo-resist from semi-conductor wafers comprising:




a film former adapted to form a film of liquid solvent onto a surface of the wafer which is to be stripped of photo-resist;

a gas exposer adapted to expose the film of liquid solvent to a source of at least one reactant gas which is substantially non-chemically reactive with the solvent and which is chemically reactive with the photo-resist so as to the strip the photo-resist from the wafer surface; and

whereby reactant gas is transported through the film of liquid solvent to the wafer surface.

SEMICONDUCTOR FABRICATION METHODS AND APPARATUS**Abstract of the Invention**

Methods and apparatus for fabricating and cleaning in-process
5 semi-conductor wafers are provided. An in-process wafer is placed within a
closed chamber. A reactant gas is incorporated in a liquid solvent to form a
"reactant mixture" that is capable of reacting with photoresist material (or other
material) on a wafer surface to facilitate removal of the material from the wafer
surface. The reactant mixture is condensed on one or more of the in-process
10 wafer surfaces to form a thin film on the surface(s) of the wafer. The solvent in
the reactant mixture acts as a transport medium to place the reactant gas on
the wafer surface. The reactant gas is then able to react with the photoresist
material (or other material) on the in-process wafer surface to effect removal the
material. Following reaction of the reactant gas with the photoresist, the thin
15 film of reactant mixture is removed from the wafer surface by flash heating,
rinsing, draining, or other suitable means.

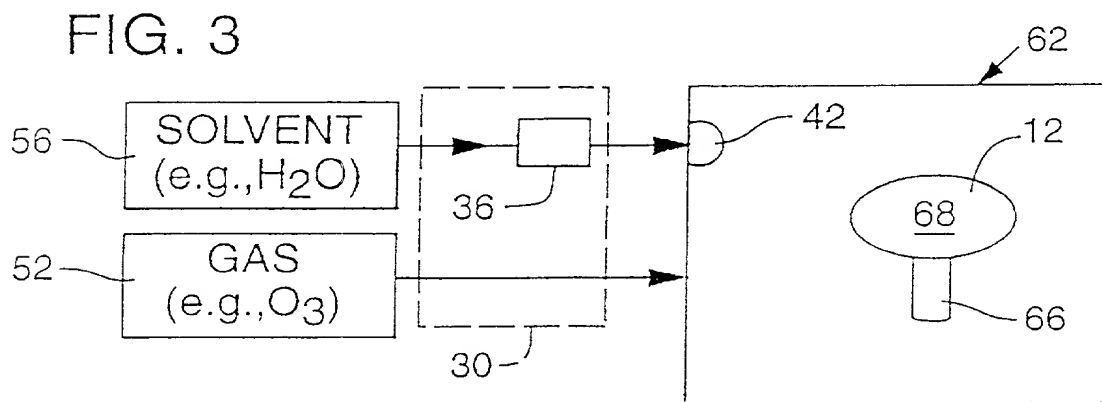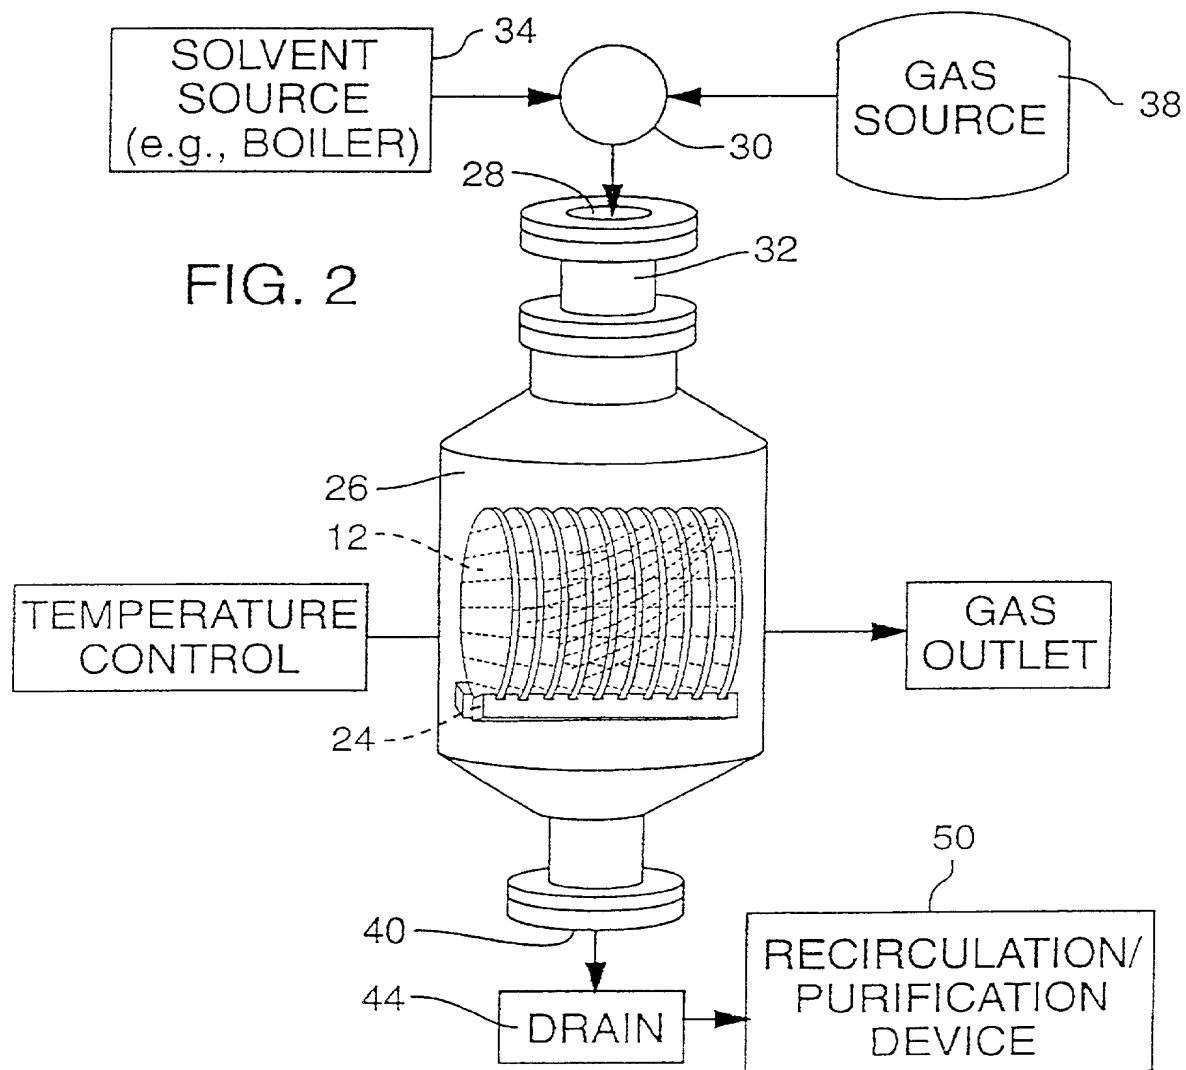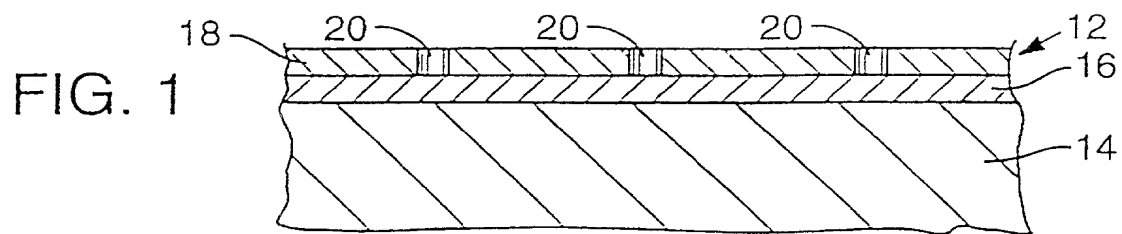

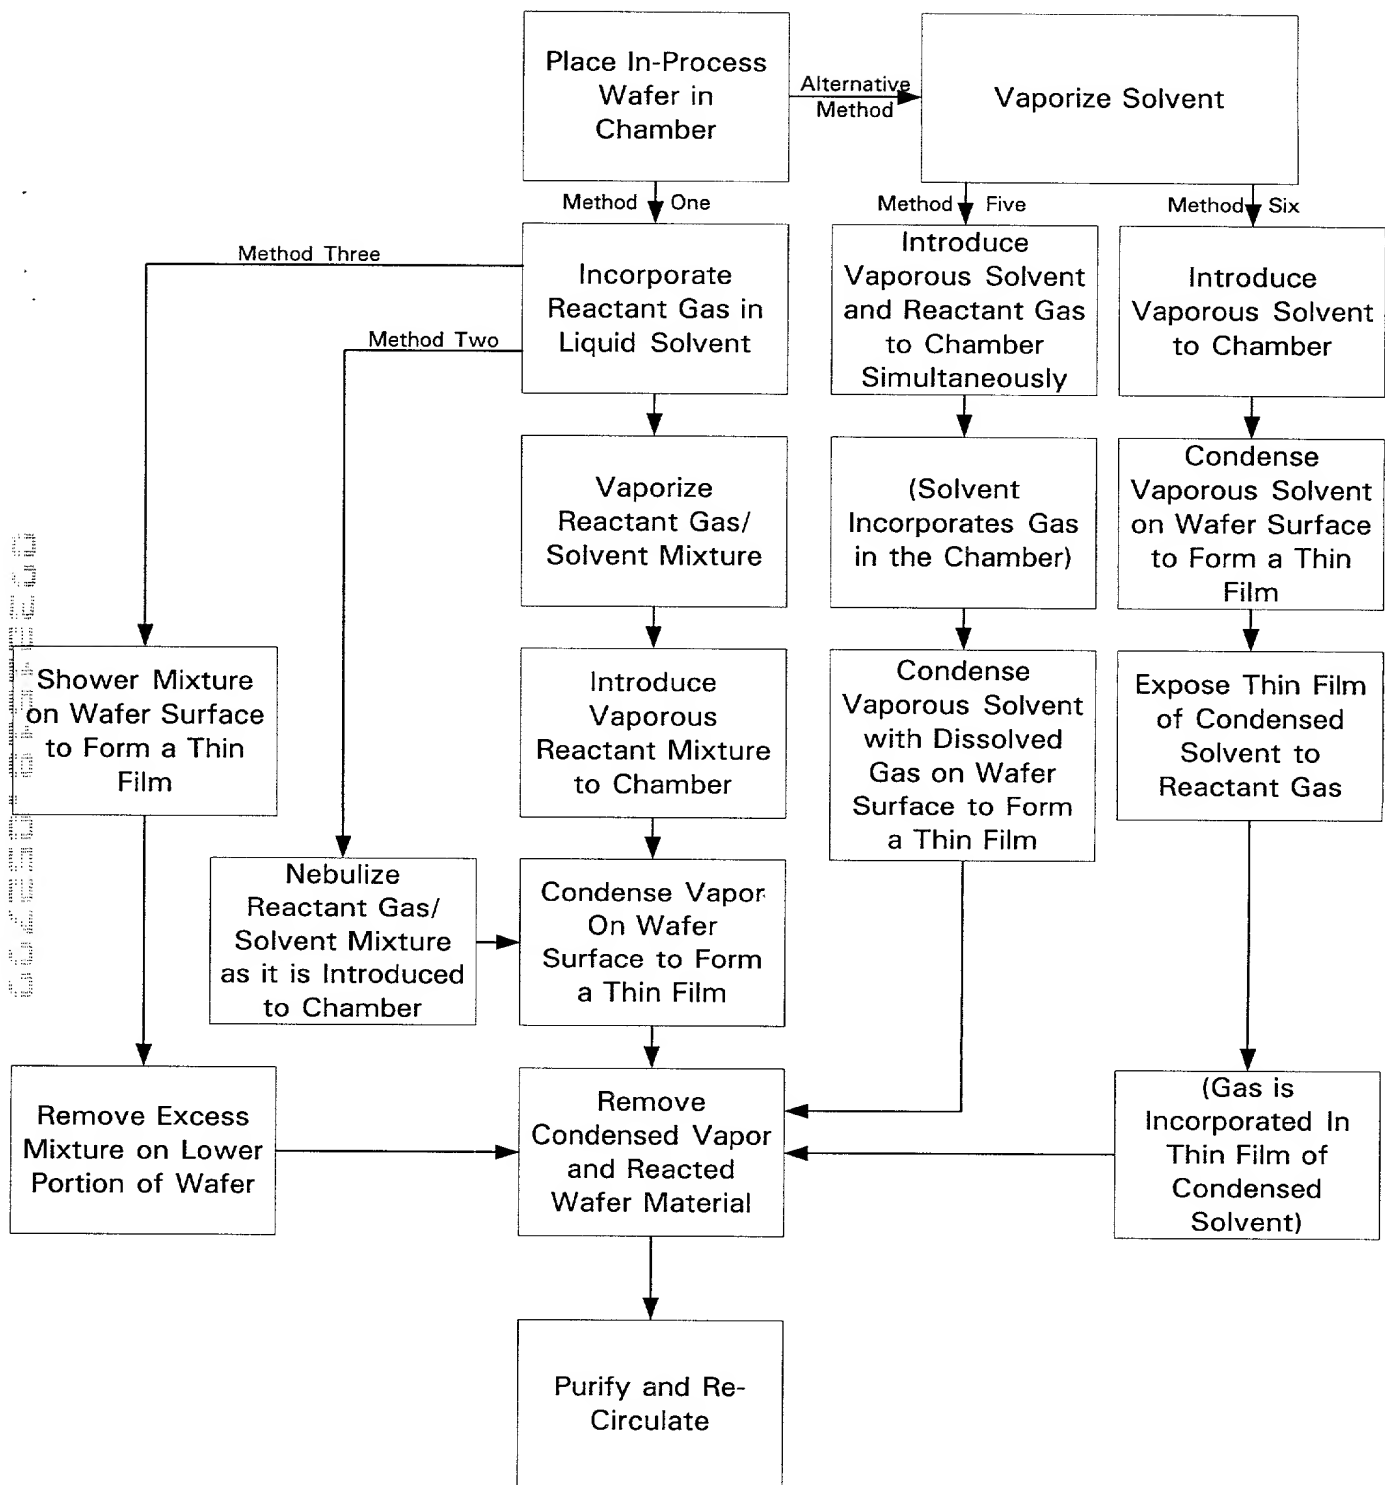


Fig. 4

DECLARATION OF INVENTOR FOR PATENT APPLICATION

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:
SEMICONDUCTOR FABRICATION METHODS AND APPARATUS, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

PRIOR FOREIGN APPLICATIONS:

I hereby state that no applications for foreign patents or inventor's certificates have been filed prior to the date of execution of this declaration.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued therefrom.

* * * * *

Full Name of Sole or first Inventor: Terry L. Gilton

Inventor's Signature



5/17/99

Date

Residence: Boise, Idaho

Citizenship: United States of America

Post Office Address: 3149 E. Nature Dr., Boise, Idaho 83706

Post Office Address: 2790 N. Oldstone Way, Meridian, Idaho 83642

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Art Unit --

Terry L. Gilton and Li Li

Application No.: --

Filed: Herewith


For: SEMICONDUCTOR FABRICATION
METHODS AND APPARATUS

Examiner: --

Date: May 14, 1999

CERTIFICATE OF MAILING

I hereby certify that this paper and the documents referred to as being attached or enclosed herewith are being deposited with the United States Postal Service on May 14, 1999 as First Class Mail in an envelope addressed to: BOX PATENT APPLICATION, ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON D.C. 20231.

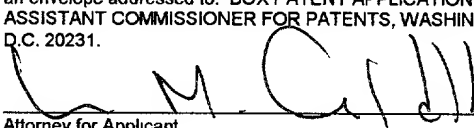
 Attorney for Applicant

**POWER OF ATTORNEY BY ASSIGNEE AND
CERTIFICATE BY ASSIGNEE UNDER 37 CFR § 3.37(b)**

TO THE ASSISTANT COMMISSIONER FOR PATENTS
Washington, DC 20231

Sir:

MICRON TECHNOLOGY, INC., the Assignee of the entire right, title and interest in the above-identified patent application by assignment attached hereto, hereby appoints the attorneys and agents of the firm of KLARQUIST SPARKMAN CAMPBELL LEIGH & WHINSTON, LLP, listed as follows:

Name	Reg. No.	Name	Reg. No.
BEAN, Gregory V.	36,448	LEIGH, James S.	20,434
BECKER, Mark L.	31,325	MAURER, Gregory L.	43,781
BELL, Adam W.	43,490	MEYER, Joel R.	37,677
CALDWELL, Lisa M.	41,653	NOONAN, William D.	30,878
CAMPBELL, James	19,978	PETERSEN, David P.	28,106
CONINGSBY, Donna J.	41,684	POLLEY, Richard J.	28,107
CONWELL, William Y.	31,943	SCOTTI, Robert F.	39,830
DeGRANDIS, Paula A.	43,581	SLATER, Stacey C.	36,011
EARP, David J.	41,401	STEPHENS JR., Donald L.	34,022
GIRARD, Michael P.	38,467	STUART, John W.	24,540
JAKUBEK, Joseph T.	34,190	VANDENBERG, John D.	31,312
JOHNSON, Michelle L.	36,352	WHINSTON, Arthur L.	19,155
JONES, Michael D.	41,879	WIGHT, Stephen A.	37,759
KLARQUIST, Kenneth S.	16,445	WINN, Garth A.	33,220
KLITZKE II, Ramon A.	30,188		

and also attorneys Michael L. Lynch (Reg. No. 30,871), Lia M. Pappas (Reg. No. 34,095), W. Eric Webostad (Reg. No. 35,406) and Charles Brantley (Reg. No. 38,086) of Micron Technology, Inc., as its attorneys with full power of substitution to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

The Assignee certifies that the above-identified Assignment has been reviewed and to the best of Assignee's knowledge and belief, title is in the Assignee, and a copy of the Assignment is submitted herewith.

Please direct all correspondence regarding this application to:

KLARQUIST SPARKMAN CAMPBELL
LEIGH & WHINSTON, LLP
Attn: Lisa M. Caldwell
One World Trade Center, Suite 1600
121 S.W. Salmon Street
Portland, OR 97204-2988

Telephone: (503) 226-7391
Facsimile: (503) 228-9446

MICRON TECHNOLOGY, INC.

Date: 5-19-99

By: 

Name: Michael L. Lynch, Esq.

Title: Chief Patent Counsel

Attachment: Copy of Assignment; Copy of Board of Directors' Resolution